

# Carport "ePIT-H435-15BFT3-5-140"

## Steel-Glulam construction with an integrated solar power system

**Solar power capacity - 6,525 kWp**




Carport "ePIT-H435-15BFT3-5-140"  
(Dimensions: Width x Depth) 591x517 cm

**Solar power capacity - 6,525 kWp**

**Complete structure - 7304 Eur *excluding* VAT**

- Modern carport with integrated solar panels
- Distinctive design for contemporary homes
- Frameless transparent solar modules
- Higher power plant efficiency with dual-sided technology
- Steel - Glulam construction
- Steel (Powder coating)
- Glulam (Triple-layer high-quality structural coating)



Solar Panels  
SOLID-B108-435W

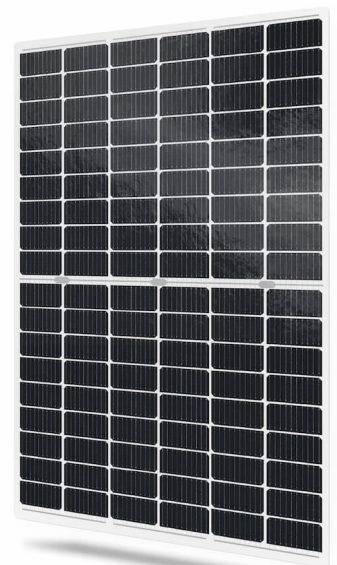

Transparent, dual-sided, frameless  
glass-glass solar modules



Carport "ePIT-H435-15BFT3-5-140"  
(Dimensions: Width x Depth) 591x517 cm

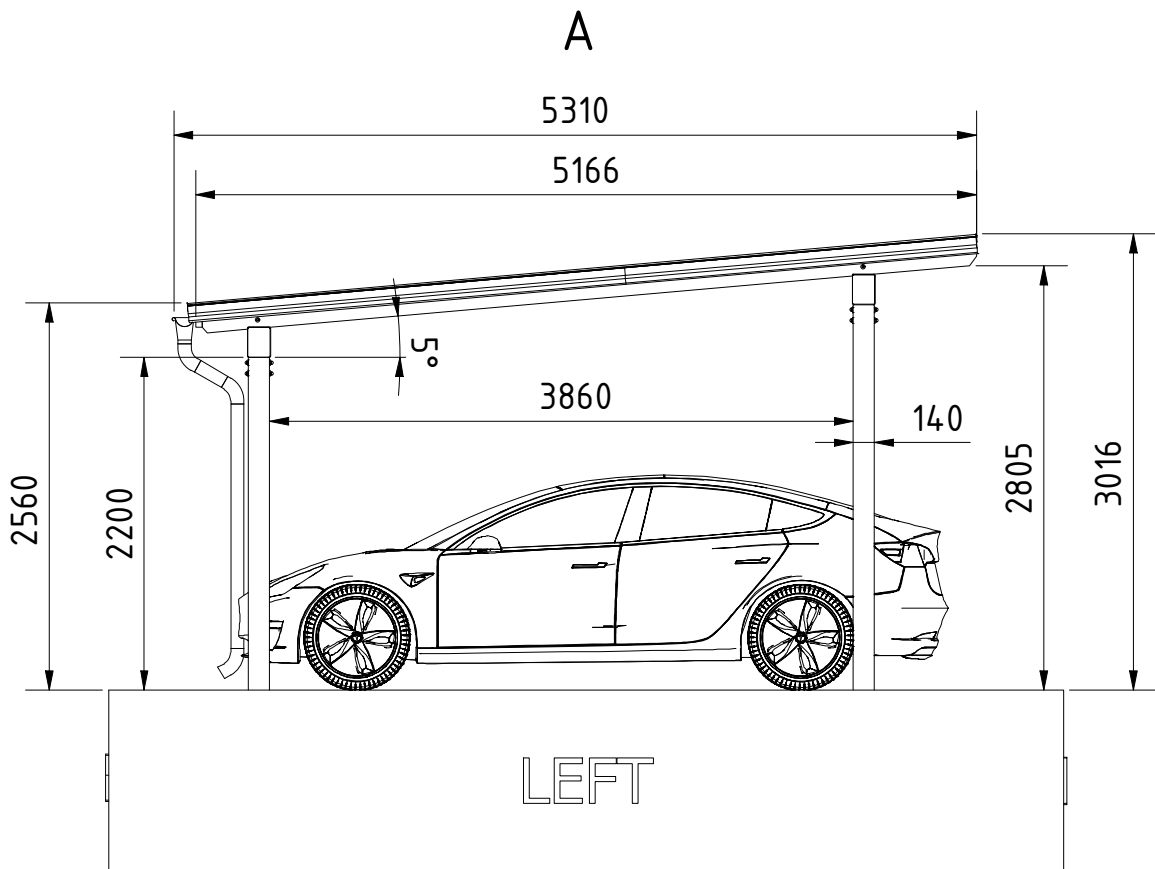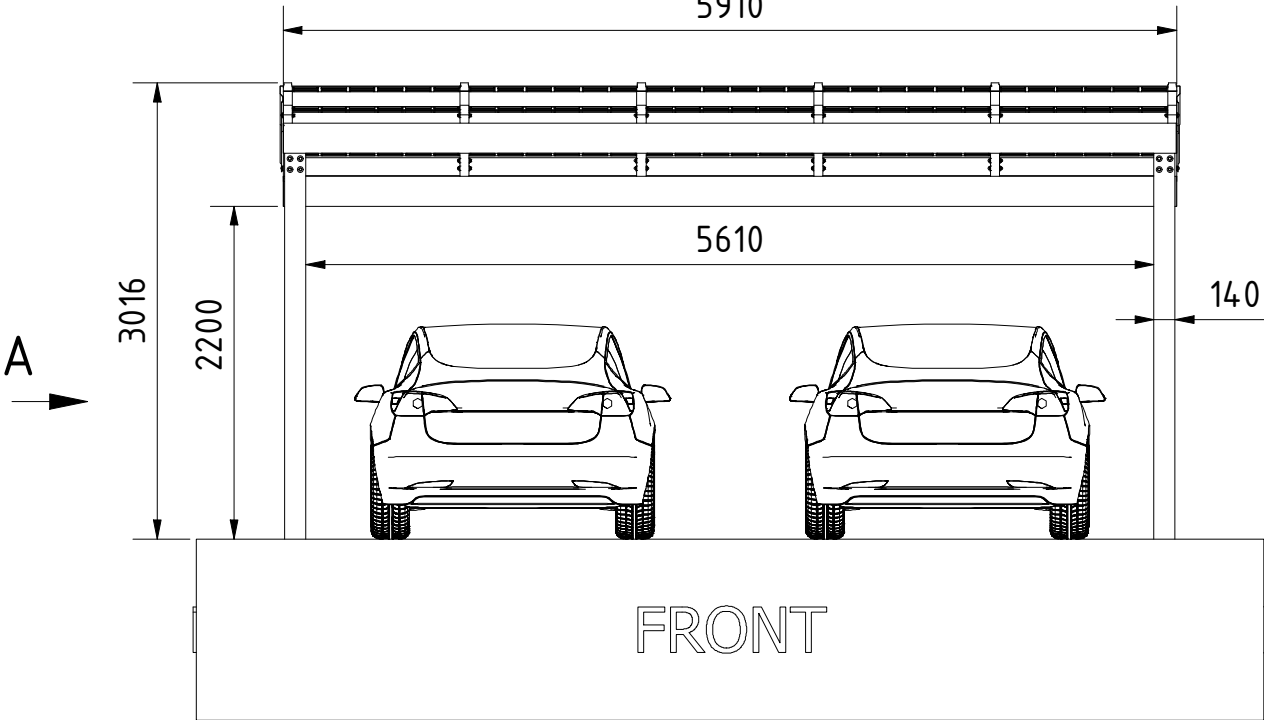



# Carport "ePIT-H435-15BFT3-5-140" 591x517 cm.

## Carport Specifications

Construction Material:	Steel - Glulam
<b>Color*</b>	Anthracite (steel) - White (glulam)
<b>Coating*</b>	Powder coating (steel) - Triple-layer coating (glulam)
Dimensions (Width x Depth mm)	5910x5166 mm
<b>Depth between pole centers (foundation)*</b>	4000 mm
Width between pole centers (foundation)	5750 mm
Total depth	5166 mm
Total width	5910 mm
Height at the front	3016 mm
Height at the rear	2560 mm
Entry height	2550 mm
<b>Rear beam height*</b>	2200 mm
Roof type	Single-pitch
<b>Slope*</b>	5°
Covering	Frameless solar panels (laminated glass-glass)
Roof panels color	Black cells - transparency 10%
Panels thickness	7,1 mm
Roof area	30,94 m2
Slope direction	Front to back
<b>Overhang at the front *</b>	676 mm
<b>Overhang at the back *</b>	350 mm
<b>Overhang at the left side *</b>	10 mm
<b>Overhang at the right side *</b>	10 mm
Coverage area	30,53 m2
<b>Column size*</b>	140x140 mm (Material - Steel)
Number of columns	4 pcs
Snow load (Sk)	1.6 kN/m2 (compliant with LT-EN1991-1-3)
Wind load m/s	32 m/s (compliant with LT-EN1991-1-4)
Installation type	Free-standing
Package weight	929 kg
Construction volume	85,1 m3
Article no.	ET3155140400022001602002003502027

*\* - Parameters that can be changed*